

Motorised Warning Sirens

Banshee Mono S /Banshee Duplo S

Banshee Mono S





- Sound output up to 123dB @ 1m
- Robust die cast aluminium housing
- Continuous rating
- IP65

Voltage	Current
12VDC	15A
24VDC	10.6A
110VAC/DC	1.5A
230VAC/DC	1.0A

Specifications:

Sound output: 123dB @ 1m (240V)
Sound frequency: 905-1200 Hz (depending on voltage)
Protection: IP65
Rating: Continuous (with thermal protector)
Voltage tolerance: ±10%
Temperature range (°C): -30 to +45
Cable Entry: 2 x M20
Construction: Powder coated aluminium
Weight: 1.66Kg

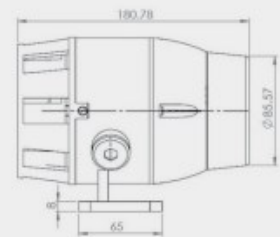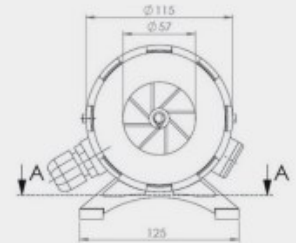

Dimensions in mm

Banshee Duplo S





- Sound output up to 127dB @ 1m
- Robust die cast aluminium housing
- Continuous rating
- IP65

Voltage	Current
110VAC/DC	1.6A
230VAC/DC	1.1A

Specifications:

Sound output: 127dB @ 1m (240V)
Sound frequency: 1600 Hz
Protection: IP65
Rating: Continuous (with thermal protector)
Voltage tolerance: ±10%
Temperature range (°C): -30 to +45
Cable Entry: 3 x M20
Construction: Powder coated aluminium
Weight: 2.9Kg

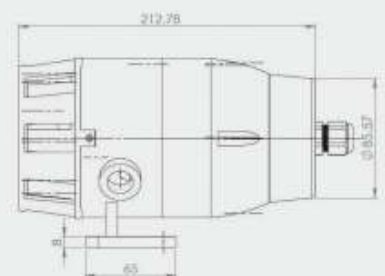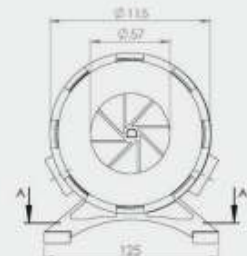

Dimensions in mm